

EASY DUNKER

Operating Instructions

SET UP

1. Select a level area for set up.
2. Unhook trailer and lights from tow vehicle and roll to set up area. (NOTE: Trailer and tank are one unit, do not try to separate!)
3. Raise tongue end of trailer and remove hitch pins from tongue bar. Slide tongue bar out and replace pins in bar.
4. Slowly lift up and set tank upright. (Be careful not to drop tank onto its bottom.)
5. Remove the transportation chains from around the arms. Drop the Bottom Canvas Arm into the horizontal position. Remove the pin securing the Top Canvas Arm from its (vertical) transportation position and put in into its horizontal position, securing it with the pin. (See



Figure 3

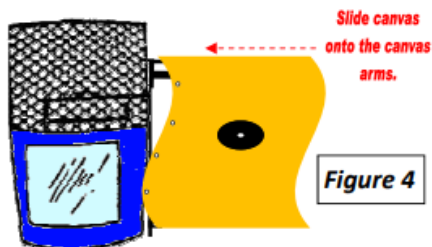


Figure 4

4. Slide the canvas onto the top and bottom canvas arms. (See Figure 4.)
5. Extend top canvas bar to full height, and use the ball bungees to secure canvas to the vertical bar. (See Figure 5.)
6. Place the arm into the trigger mechanism. Put the other end trough the hole in the canvas. Make sure the arm drops into

the tube on the side of the frame. Insert the target into the end of the arm, and screw tight.

7. Place one hand on the front of the seat and push down. With the other hand test the target to see that it works properly.
8. Check drain plug to make sure it is tight and then fill tank to the top with water (approx. 500 gallons).
9. REVIEW SAFETY RULES WITH ALL PARTICIPANTS.

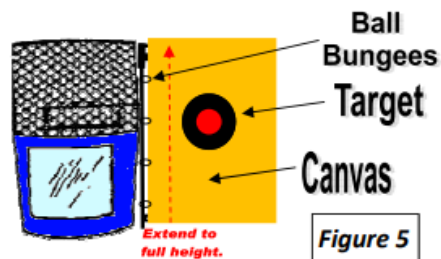


Figure 5