




DUNK TANK

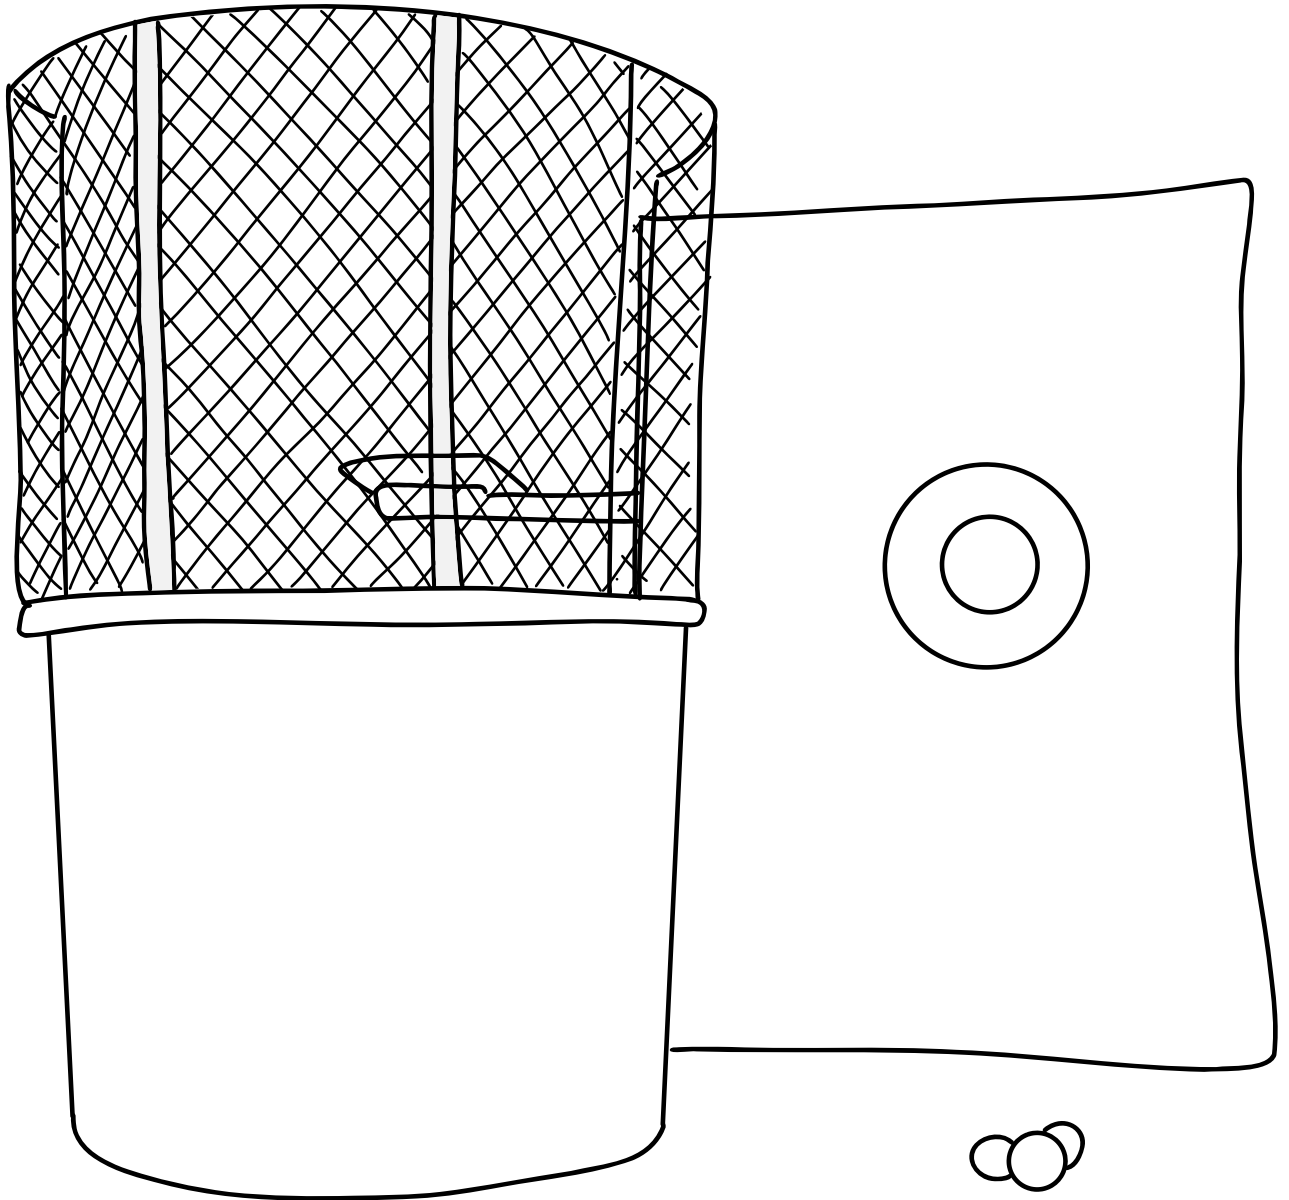

DUNK TANK

SET UP:

1. Select a level area for setup.
2. Unhook trailer and lights from tow vehicle and roll to set up area. (NOTE: Trailer and tank are one unit, do not try to separate!)
3. Raise tongue end of trailer and remove hitch pins from tongue bar. Slide tongue bar out and replace pins in bar.
4. Slowly lift up and set tank upright. (Be careful not to drop tank onto its bottom.)
5. Remove the transportation chains from around the arms. Drop the bottom canvas arm into the horizontal position. Remove the pin securing the top canvas arm from its (vertical) transportation position and put in into its horizontal position, securing it with the pin.
6. Slide the canvas on to the top and bottom canvas arms.
7. Extend top canvas bar to full height, and use the ball bungees to secure canvas to the vertical bar.
8. Place the arm into the trigger mechanism. Put the other end trough the hole in the canvas. Make sure the arm drops into the tube on the side of the frame. Insert the target into the end of the arm, and screw tight.
9. Place one hand on the front of the seat and push down. With the other hand test the target to see that it works properly.
10. Check drain plug to make sure it is tight and then fill tank to the top with water (approx. 500 gallons).

TOWING:

1. Be sure the chains are wrapped around the canvas arms and secured. Then slowly tilt tank back onto its wheels. Place seat in its “up” position and lock.
2. Insert hitch tongue and use both pins to secure it.
3. Attach trailer to vehicle. Put pin or bolt through hitch release lever and secure. Attach safety chain to vehicle. NOTE: Always use the safety chain when towing.
4. Hook up lights to tow vehicle, and be sure to test the turn signals and brake lights before towing.
5. Place bin with target, target arm, and balls safely in tow vehicle.