




UPLIGHTS

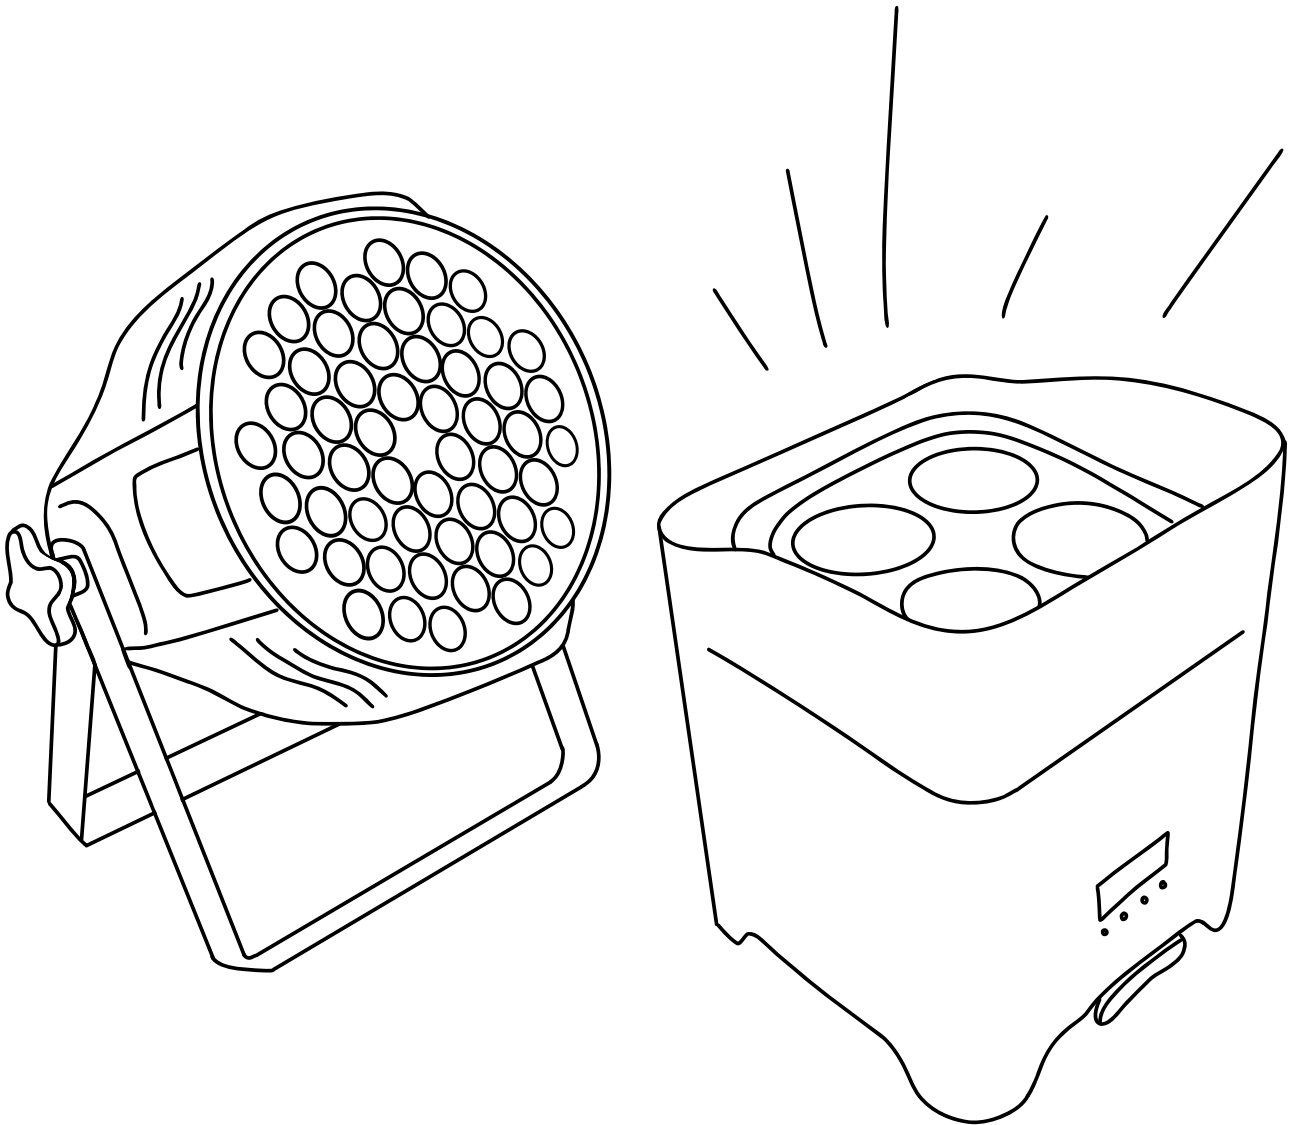

UPLIGHTS

SILVER:

STATIC COLOR

The LED light fixture has separate DIP switches for each of the 3 colors (red, green, and blue.) These are accessed via the DIP switches on the back of the light. Each of the 3 colors may be mixed to produce different colors. Please see the chart below for some basic color options.

MODE DIP SWITCHES

Master Static 8, 9, 10 = on (These must be on to keep color static.)

Static (**WHITE**) 2, 3, 4, 5, 8, 9, 10 = on

Static (**RED**) 1, 2, 8, 9, 10 = on

Static (**GREEN**) 3, 4, 8, 9, 10 = on

Static (**BLUE**) 5, 6, 8, 9, 10 = on

Static (**PINK**) 1, 2, 5, 8, 9, 10 = on

Static (**PURPLE**) 1, 2, 5, 6, 8, 9, 10 = on

AUTOMATIC

The LED light fixture has a preprogrammed color fade program. This is accessed via the DIP switches on the back of the light. The speed can be increased as well. Please see the chart below:

MODE DIP SWITCHES

Master Auto 7, 9, 10 = on

Increase Speed 1, 2, 3, 4, 5, 6 = on


BLACK & MARQUEE:

<MENU> Used to scroll through the current operating mode, as well as back out of the current menu option

<UP> Used to select increasing advancement in the value

<DOWN> Used to select decreasing advancement in the value

<ENTER> Used to select a value and store it to memory

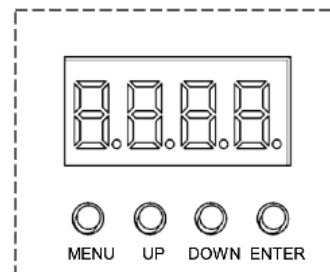

AUTOMATIC: preprogrammed chases
press MENU until P-- appears on the screen

STATIC: preset colors
press MENU until C-- appears on the screen